



INDUSTRIAL & DOMESTIC MAGNETIC FILTERS / LIME PREVENTION DEVICES

DEEP CLEAN
Magnetic Filter Equipments / Powerflushing Systems



MAGNETIC FILTER

2026 PRODUCT



CATALOG

INDUSTRIAL & DOMESTIC MAGNETIC
FILTERS / LIME PREVENTION DEVICES

**ENDÜSTRİYEL VE KONUTLAR İÇİN
KİREÇ VE TORTU TUTUCU FİLTRE
EKİPMANLARI**



Manufacturer
TORYAP GRUP
BURSA/TURKİYE

BOILER SMALL MAGNETIC FILTER



- 3/4" connection
- 6 bar 80°
- 8000 gs



ECO MAGNETIC FILTER



- 3/4" connection
- 10.000 gs
- 6 bar 80°

ECO



MINI MAGNETIC FILTER

- 3/4" connection
- 10.000 gs
- 6 bar 80°



MAXI MAGNETIC FILTER

- 3/4" connection
- 10.000 gs
- 6 bar 80°



MAXI 1" MAGNETIC FILTER



- 1" connection
- 10.000 gs
- 6 bar 80°



MAXIMAG MAGNETIC FILTER

- 3/4" connection
- 10.000 gs
- 5 bar 80°

P2



- 3/4" connection
- 10.000 gs
- 5 bar 80°

P1



- TRANSPARENT

RODMAG MAGNETIC FILTER KIT

- Heat Pump Systems
- Heating systems
- 11000 gs
- Easy connection
- 3/4" connection
- Transparent
- 8 bar 80°



CLEANING KIT



- TRANSPARENT

DUALMAG MAGNETIC FILTER KIT

- Heat Pump Systems
- Heating systems
- 11000 gs
- Easy connection
- 3/4" connection
- Transparent
- 8 bar 80°



CLEANING KIT



RODMAG -HT MAGNETIC FILTER INDUSTRIAL

- Heat Pump Systems
- Heating systems
- 11000 gs
- Easy connection
- 1/2-3/4" connection
- Transparent
- 8 bar 80°



HEATMAG DIGI-BL
MAGNETIC FILTER



HEATER/ 20-60 degree
Digital Control pannel
/ 1500watt
11.000 gs
magnet power
10 bar 60°
Rod box 900 ml
3/4" connection



Digital Control pannel



MAGNETIC ROD

HEATMAG-BL
MAGNETIC FILTER



HEATER/thermostatic
20-60 degree / 1500watt
11.000 gs
magnet power
10 bar 60°
Rod box: 900 ml
3/4" connection



DUALMAG-BL
MAGNETIC FILTER



2 pcs
11.000 gs
magnet power
10 bar 80°
Rod box: 900 ml
3/4" connection



RODMAG-BL
MAGNETIC FILTER



11.000 gs
magnet power
10 bar 80°
Rod box: 450 ml
3/4" connection




MAX-CLEANMAG MAGNETIC SEDIMENT MAGNETIC FILTER INDUSTRIAL

ORDER CODE
TYPE
SIZE
1"
1 1/4"
1 1/2"
2"

TECHICAL DATASHEET


Brass
Stainless steel wire filter
Brass valve
Threaded connection
Max.working pressure : 10 Bar
Max.Working temperature : 110 C

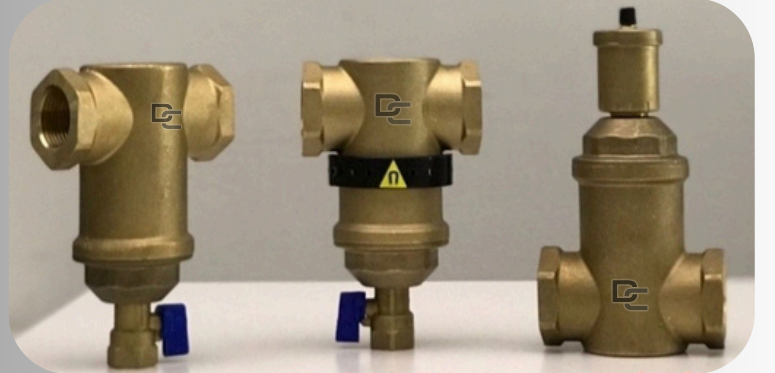

BOILER MAGNETIC FILTER

DC07-Y01Mini


DIMENSIONS

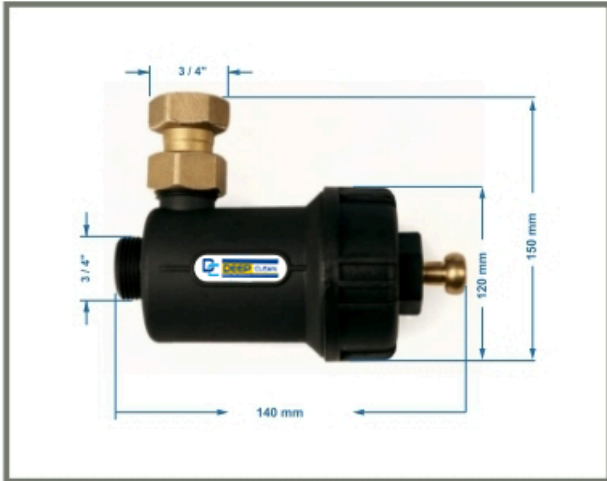

HORIZONTAL MOUNTING




VERTICAL MOUNTING

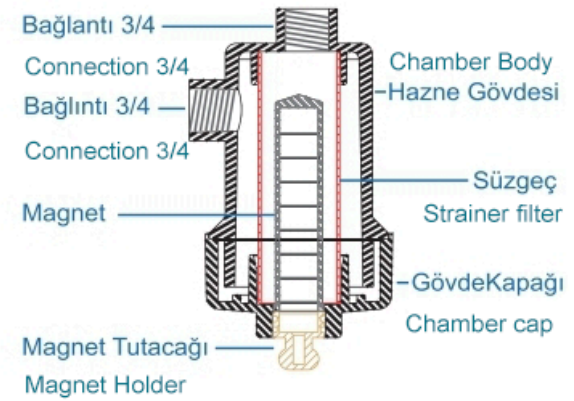

PAART DETAILS

PARTS

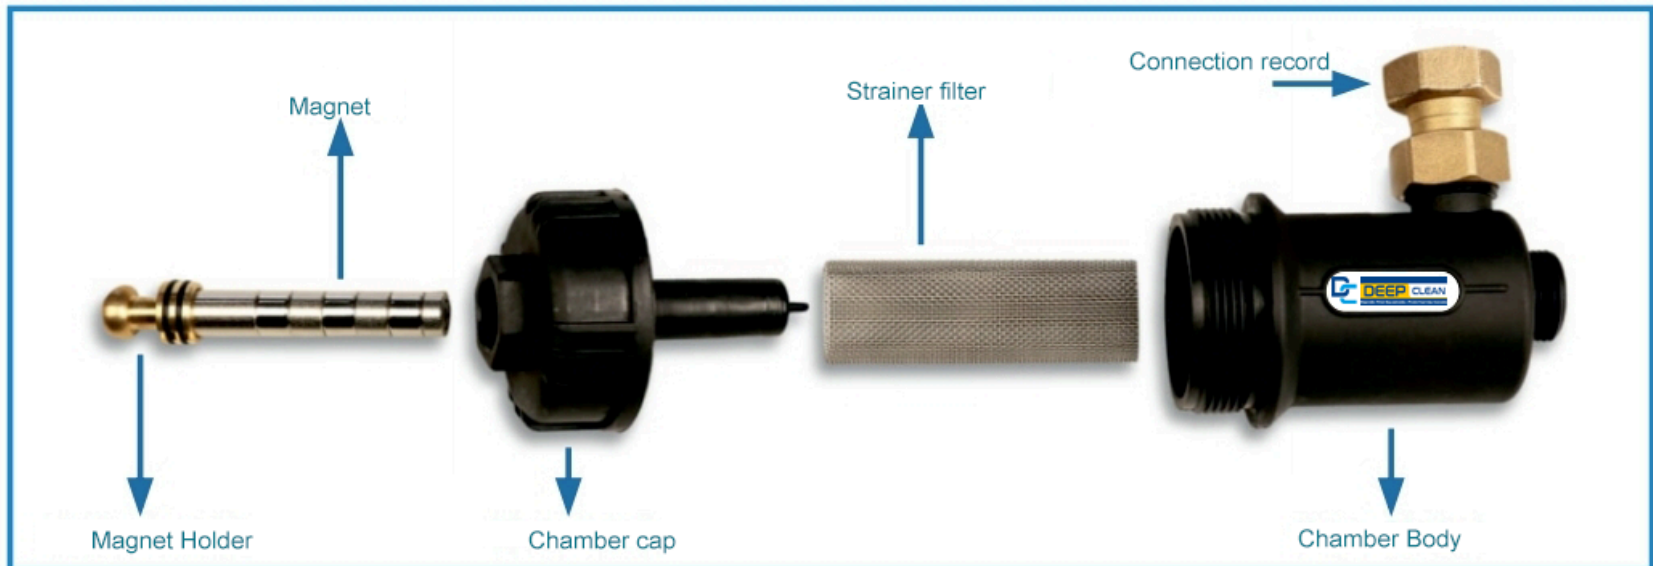

TECHNICAL DETAILS


- Cartridge Chamber Body
- Strainer cover
- Strainer
- Magnet:
- Operating Temperature:
- Max. Operating Temperature:
- Operating pressure:
- Max. Working Pressure:
- Connection:

Polyamide PA66 +30% GF
Polyamide PA66 +30% GF
AISI 304 - 800 µm
Neodymium 12.000 Gauss
0÷90°C
120°C
3 bar
4,5 bar
3/4



BOILER FILTER


SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L240.6.DN100.F.304.10

Connection Type	DN100 – 4”
“N” Number of Bars	6xØ25mm – 1”
“L” Length of the Bar	240mm – 9.5”
“C” Distance Between Connections	350mm – 14”
“H” Height of the Body	250mm – 10”


SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L240.6.DN80.F.304.10

Connection Type	DN80 – 3”
“N” Number of Bars	6xØ25mm – 1”
“L” Length of the Bar	240mm – 9.5”
“C” Distance Between Connections	350mm – 14”
“H” Height of the Body	250mm – 10”


SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L90.4.DN25.F.304.10

Connection Type	DN25 – 1”
“N” Number of Bars	4xØ25mm – 1”
“L” Length of the Bar	90mm – 3.5”
“C” Distance Between Connections	250mm – 10”
“H” Height of the Body	100mm – 4”


SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L140.6.DN65.F.304.10

Connection Type	DN65 – 2½”
“N” Number of Bars	6xØ25mm – 1”
“L” Length of the Bar	140mm – 5.5”
“C” Distance Between Connections	300mm – 12”
“H” Height of the Body	150mm – 6”


SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L90.6.DN40.F.304.10

Connection Type	DN40 – 1½”
“N” Number of Bars	6xØ25mm – 1”
“L” Length of the Bar	90mm – 3.5”
“C” Distance Between Connections	300mm – 12”
“H” Height of the Body	100mm – 4”

SPECIAL
PRODUCE
MAGNETIC FILTER
INDUSTRIAL



P.FLT.MC.F304.N.D25L140.6.DN50.F.304.10

Connection Type	DN50 – 2”
“N” Number of Bars	6xØ25mm – 1”
“L” Length of the Bar	140mm – 5.5”
“C” Distance Between Connections	300mm – 12”
“H” Height of the Body	150mm – 6”



+905327099015



www.toryapgrup.ro



Bursa TURKIYE

HEATING SYSTEMS CLEANING & CARE

MAGNETIC



FILTER TOOLS

www.toryapmachine.com

TORYAPGRUP



DEEP Clean

Magnetic Filter Systems

Manufacturer

TORYAP GRUP

BURSA/TURKIYE

